

## ARTWORK REQUIREMENTS

### MECHANICAL PROPORTION & SCALE

- 1/2" = 1' @ 600 DPI
- Mechanical Live Size: 29.63" H x 14.29" W
- Bleed (including pockets): 30.38" H x 15.04" W

### SIDES & POCKETS

- 3" Pockets included in visible area and to be printed
- No grommets required


### MATERIAL

- 8oz. Lightweight Vinyl

### DIGITAL FILE SPECIFICATIONS

- Convert all text to outlines
- Include all imported graphics or files
- Color Mode: CMYK
- Preferred File Formats: .jpg, .tif, .psd, .pdf files accepted

**NOTE: Print-ready art is due 10 days prior to posting.**

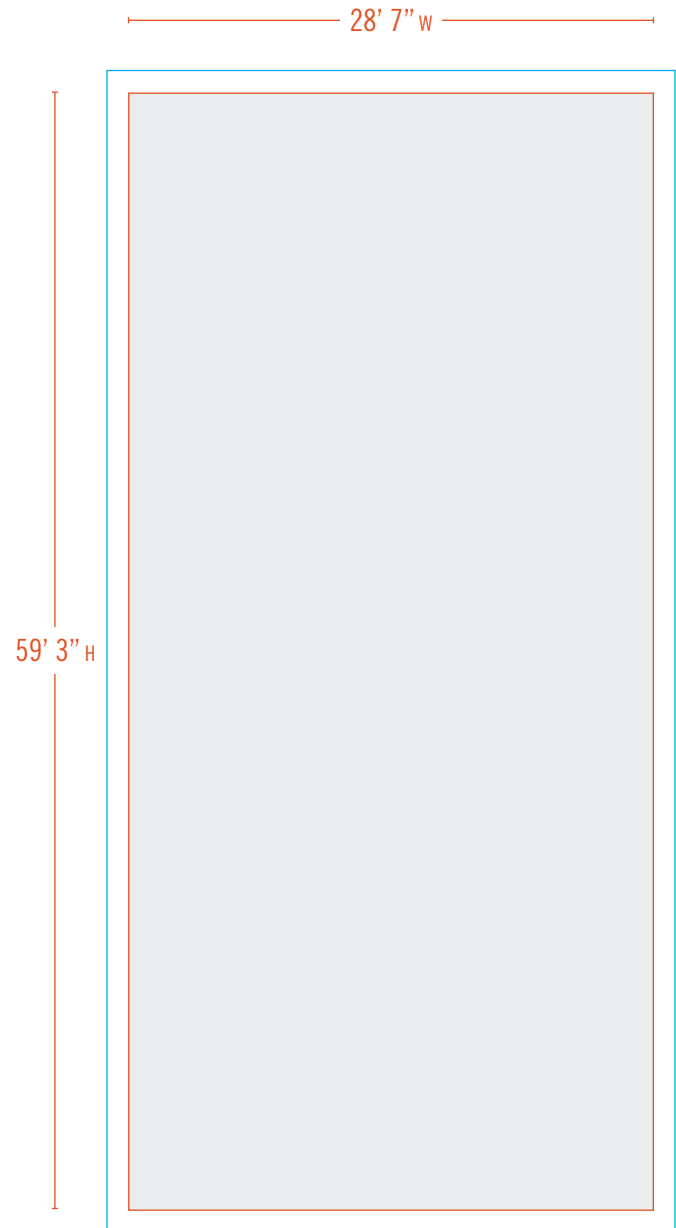

## SHIPPING / PRODUCTION

### GENERAL PRODUCTION INFORMATION

All vinyl material is required to be accepted by the MEA as flame resistant in accordance with the 1996 edition of NFPA 701 (Standard Methods of Fire Tests for Flame Propagation of Textiles and Films). The edge restraint system along the entire periphery of the vinyl display will have welded seams. The vinyl sign fabric will be stamped with the date of the original manufacture by the vendor. Print-ready art is due ten days prior to posting date. Please provide a layout of the image and registration marks on the top left of live area of the vinyl for installation.

**PROOFS:** Electronic proofs will be provided for approval. Production does not begin until a proof is approved. Hard proofs are available but add a minimum of 48 hrs to the production timeline, and incur an additional fee.

**LABELS:** Finished products delivered to installers are required to have labels. Please include an image of the copy along with measurements of the product.

### SHIPPING CONTACT

Chambers Electrical Services  
6063 N 57th Drive, Glendale, AZ 85301  
(623) 934-1370

### PRODUCTION CONTACT

programming@brandedcities.com

### 59' 3" x 28' 7" Vinyl Wallscape

Scale: 1/2" = 1'

Live Area: 29.63" H x 14.29" W

Bleed (including pockets): 30.38" H x 15.04" W